

LINEA 470 – Special Version




**6 poles plug
connector for filler**



**trays
placing**



**sonar position
checking trays
under filler**

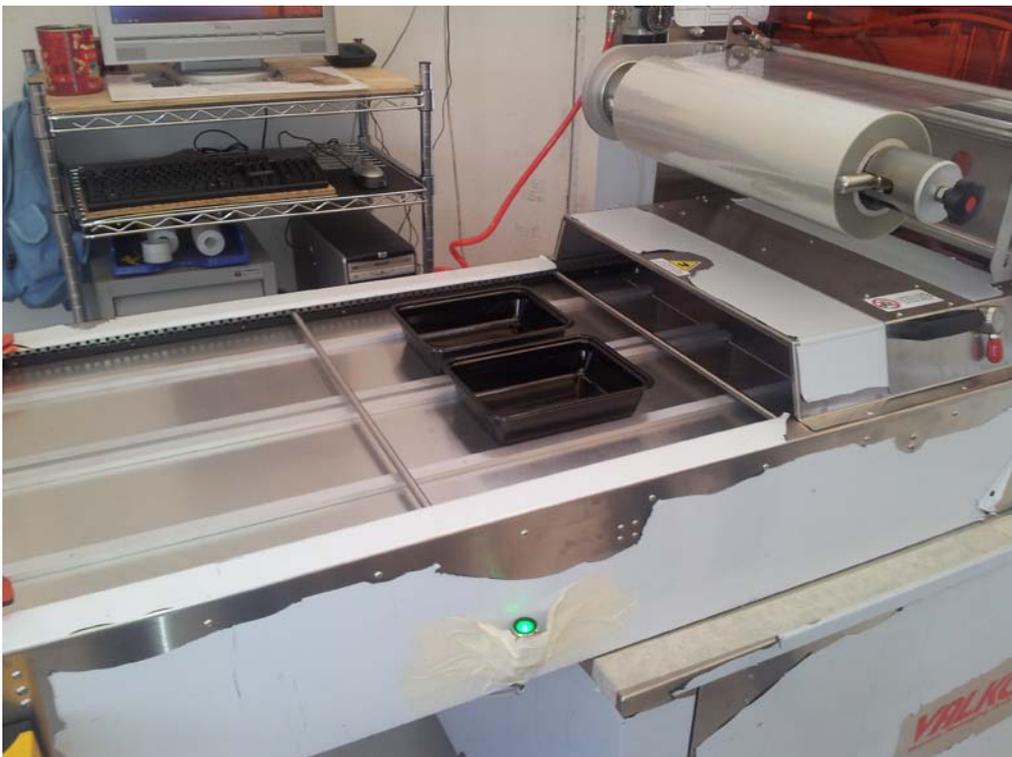


**trays position
during filling process**



**trays position
during filling process**

**position of
the filler**

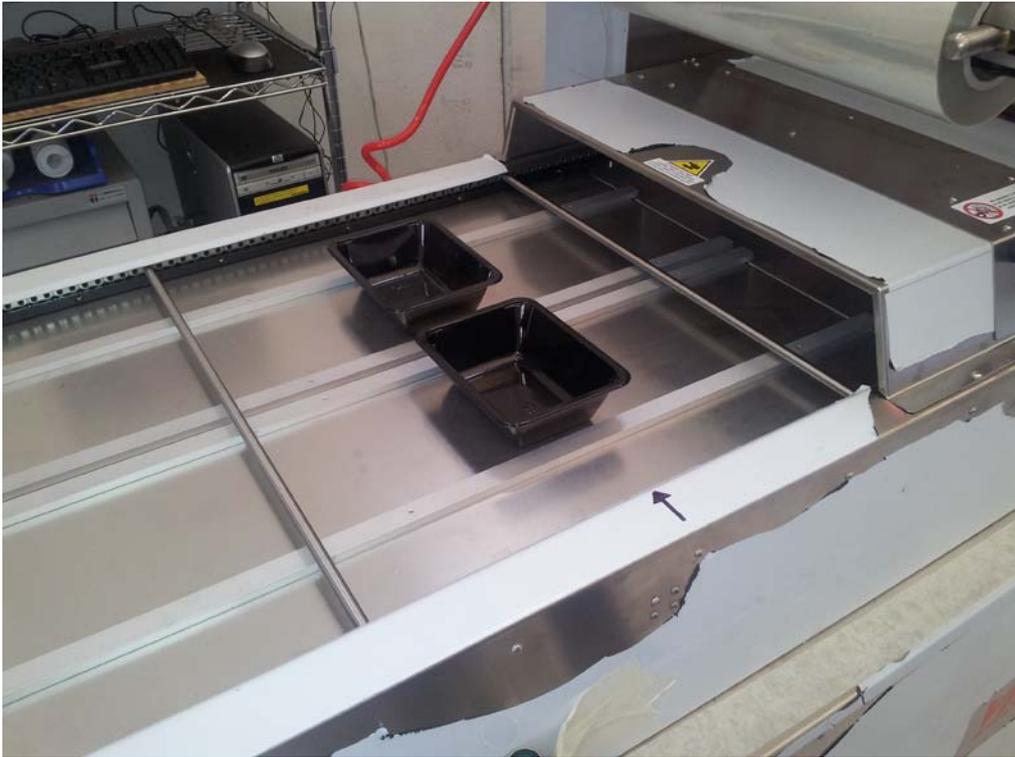

**trays position
during filling process**



**internal detail
back machine**



**internal detail
front machine**

6 POLES PLUG CONNECTOR FOR FILLER LINEA 470

PIN 1,2 = OUTPUT: Enabling Feeder (clean contact Normally Opened, 1.5A @ 230V max).
Note: remains closed during the whole dosing phase.

PIN 3,4 = OUTPUT: +24 Vdc (1A max).

PIN 5,6 = INPUT: Filling completed (clean contact Normally Opened, 1A max @ 24Vdc).

